

Highlights:

- Stores up to 12 units of 19" Equipment
- Punched square holes for use with snap-in cage nuts
- HexaSlide™ extending equipment bay
- Retracted and extended position locking
- Cable management rear supports
- Ships as assembly package (2 cartons)
- In-wall / furniture integration for 19" equipment
- Can carry a max load of 60 kg

The GPR412 is a professional and solid constructed slide-out rack for 19" equipment compliant to ANSI/EIA RS-310D, DIN41491 and IEC60297 standards. It offers a flush mount solution for installation up to 12 units of equipment. The HexaSlide™ extending equipment bay combined with cable management rear supports allows rack integration into walls or furniture, while keeping the rear side of the equipment accessible for maintenance and servicing. Position locking in extended position with rotation angles for 45° and 90° allows easy fitting for the equipment, while locking in retracted position offers optimal security and stability for permanent installation. The construction is made of 3.0 mm thick steel profiles and finished in a black (RAL9004) powder coating with fine structure and printed unit measurement indicators.



Product Features:


Dimensions	503 x 611 x 489 mm (W x H x D)	
Unit height	12 HE	
Max. usable depth	425 mm	
Max. load	60 kg	
Colours	Black (RAL9004)	
Weight	36.26 kg	
Accessories	Included	24 x Cage nuts + screws
	Optional	KM600A - M6 Cage nuts


Variants:

- GPR412/B - Black version

Architects' and Engineers' Specifications:

The rack shall be a 19" slide-out rack type suitable for flush mount installation use which complies to ANSI/EIA RS-310D, DIN41491 and IEC60297 standards with 12 usable rackspaces. It shall have the following dimensions: height 611 mm, width 503 mm and depth 611 mm with a weight of kg. The rack shall allow in-wall and in-furniture installation for 19" equipment, featuring an HexaSlide™ extending equipment bay which can be locked in extended position and rotated over 45° and 90° angles for easy fitting of the equipment. In retracted position, it shall be lockable for optimal stability and security in permanent installation. Supports on the rear sides shall guide connection cables when extending the equipment bay. The frame of the rack shall be constructed out of cold rolled steel with a thickness of 3.0 mm, while punched square holes for use with snap-in cage nuts shall be provided for fixation of the equipment. The finishing shall be done in a textured black powder coating (RAL9004) color and have printed unit measurement indicators. The rack shall ship as an assembly kit consisting of two packages and provide a static load capacity of 60 kg.

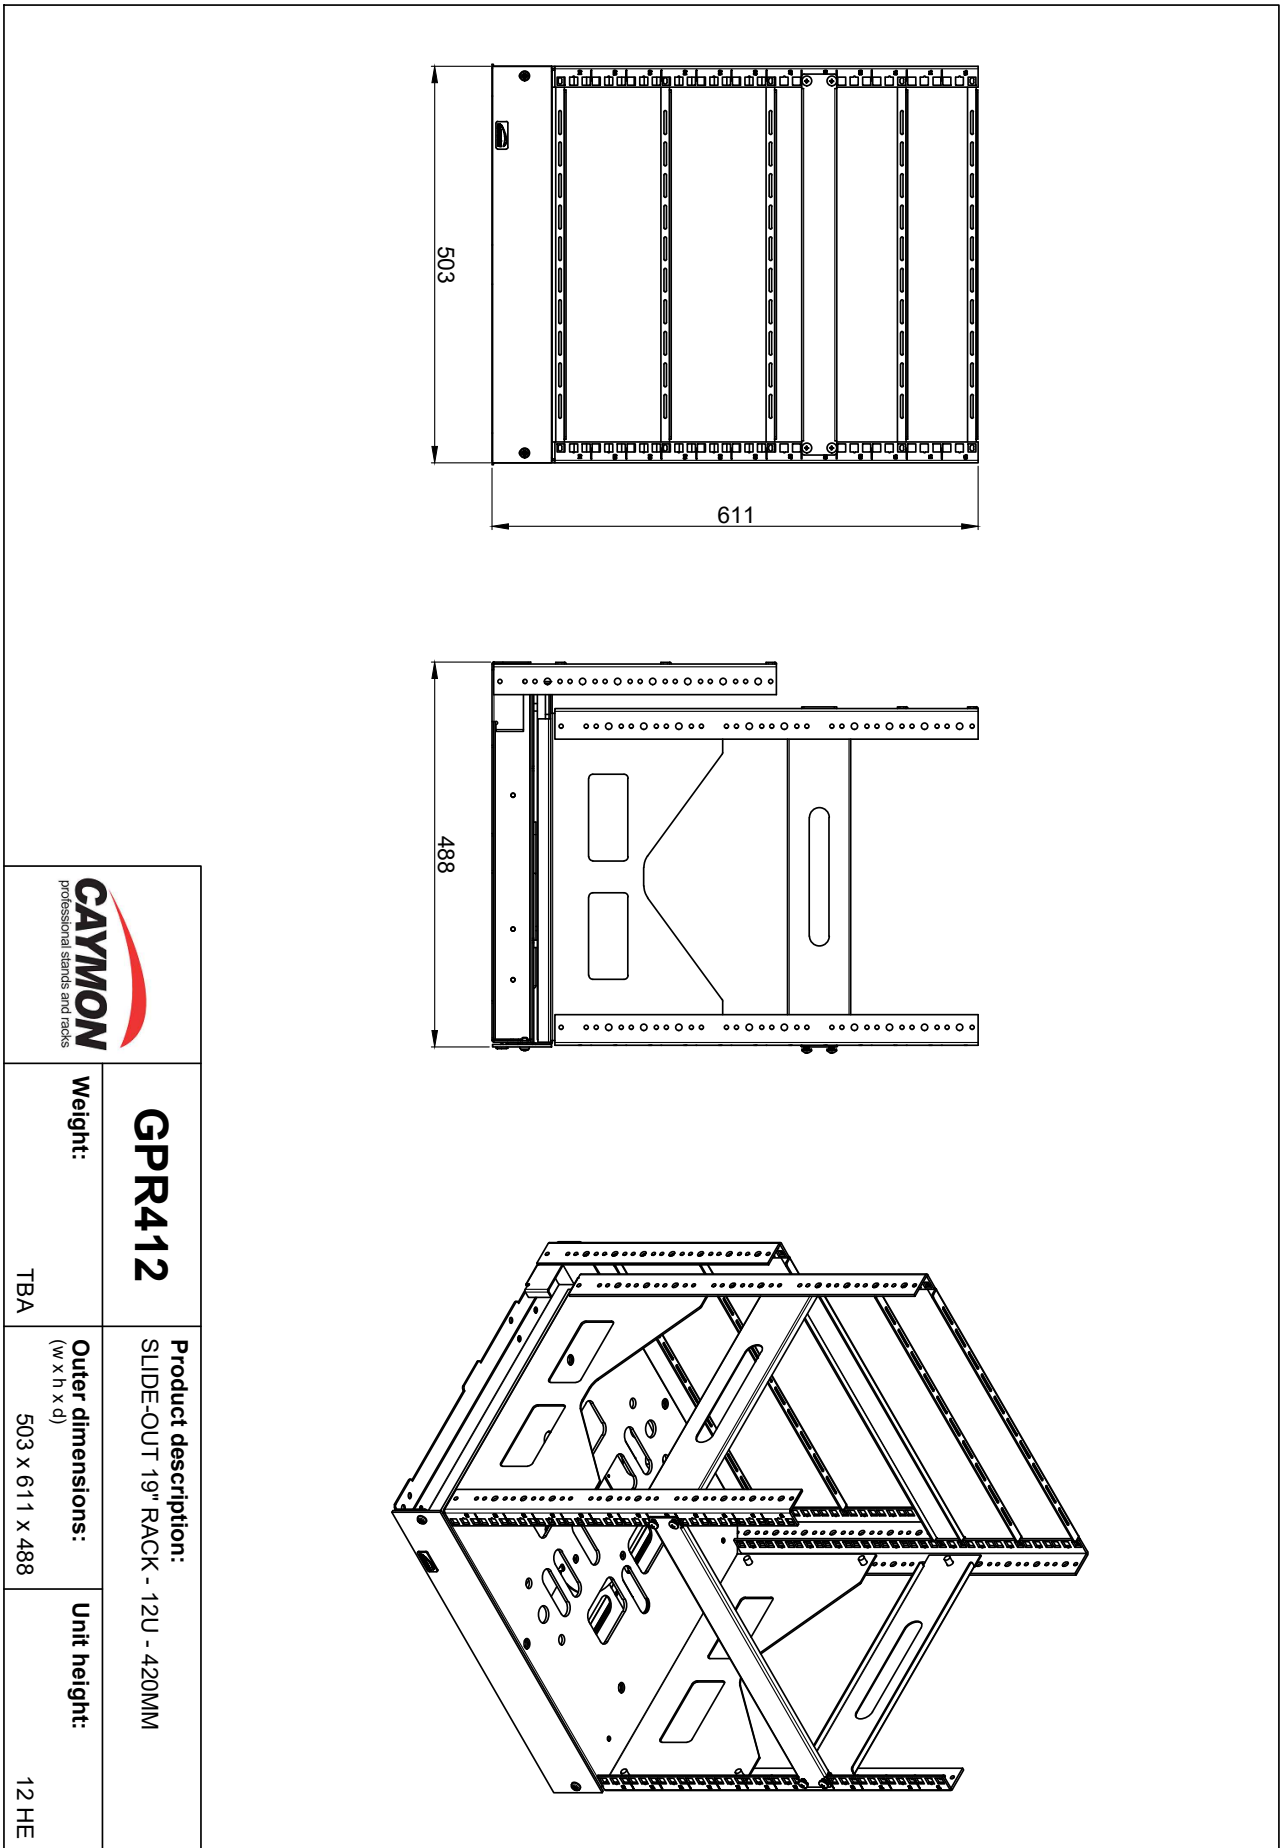

	
GPR412	Product description: SLIDE-OUT 19" RACK - 12U - 420MM
Weight: TBA	Outer dimensions: (w x h x d) 503 x 611 x 488
Unit height: 12 HE	