

### Highlights:

---

- Stores up to 32 units of 19" Equipment
- Standard keylock for both doors
- Integrated ventilation grid on top
- 50 mm Wheels + leveling feet included
- Removable sides for easy installing & cabling
- Punched square holes for use with snap-in cage nuts
- Front and rear in depth adjustable 19" profiles (max 740 mm)
- Tempered glass door with keylock
- Reversible door position

The SPR832 is a professional 19" rack compliant to the ANSI/EIA RS-310D, DIN41491 and IEC60297 standards. A cold rolled steel 2 mm thick frame and 1,2 mm thick plates provides a solid and stable construction making it suitable for heavy equipment, storing up to 32 units inside. The SPR832 comes fully assembled including 50 mm wheels for easy moving and adjustable feet for fixing and leveling once correctly positioned. The 19" mounting profile with punched square holes for use with snap-in cage nuts in combination with the printed unit measurement indicators ensure an easy fitting of the equipment. Adjustable 19 " profiles provide great flexibility for installing equipment depending on its depth. Both front and rear doors are fitted with a standard keylock.



## Product Features:


---


Unit height		32 HE
Weight		84 kg
Colours		Black (RAL9004)
Max. usable depth		740 mm
Wheel	Diameter	50 mm
Dimensions		600 x 1540 (1610) x 800 mm (W x H (incl. feet) x D)
Static load capacity (adjustable feet)		800 kg
Dynamic load capacity (transport castors)		400 kg
Accessories	Included	4 x Key for sidepanel lock
		1 x Allen key
		4 x Levelling feet
		4 x Key for front/back door
		20 x KS600
		20 x KM600
	Optional	KS600 - M6 x 16 mm bolt DIN7985 Black
		KM600 - M6 Cage nuts
		SPR60LR - L-rail (horizontal support)
		SPR10CS - Rack interconnection slot
		SPR80LR - L-Rail pair
		SPR80FS - Fixed shelf
		SPR80SS - Sliding shelf
		SPR80PT - Rack plinth

## Architects' and Engineers' Specifications:

---

The rack shall have the following dimensions: Height 1540 mm, Depth 800 mm, Width 600 mm, have a Weight of 82 kg and hold up to 32 units. The rack shall comply with ANSI/EIA RS-310D, DIN41491 and IEC60297 standards. 50 mm wheels will be included as well as leveling feet. The frame of the rack shall be constructed out of cold rolled steel of 2 mm thick while for the other parts a thickness of 1.2 mm shall be used. These parts shall have a textured black powder coating (RAL9004) color. The mounting rail shall be adjustable in depth on the front and rear side and have unit measurement indicators on the front side. Rack shall include tempered smokey grey glass door on the front side and a steel door on the rear side, both equipped with standard key-lock. Sides of the rack shall be removable and the top shall have a ventilation grid.

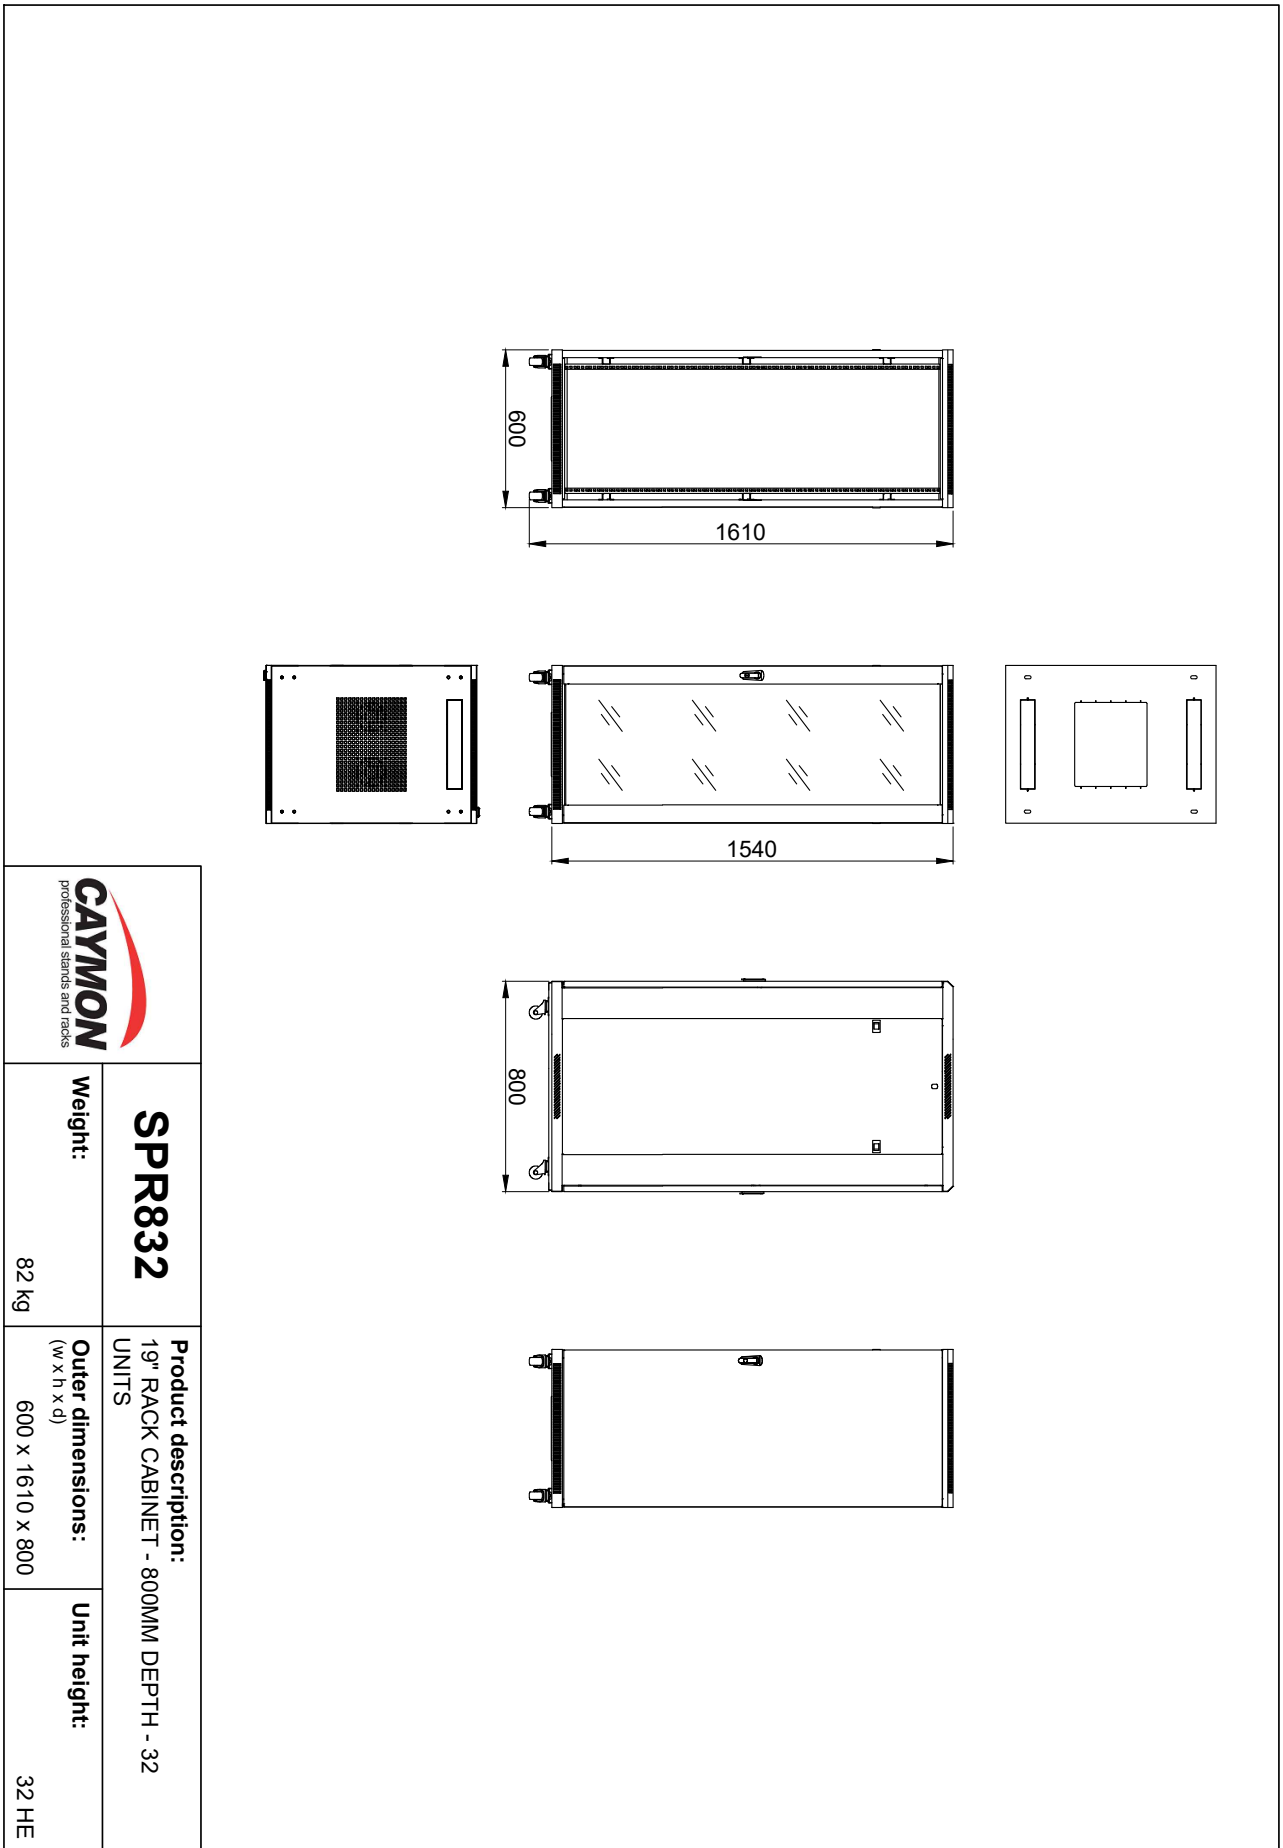

	
<b>SPR832</b>	<b>Weight:</b>
82 kg	82 kg
<b>Product description:</b>	
19" RACK CABINET - 800MM DEPTH - 32 UNITS	
<b>Outer dimensions:</b> (w x h x d)	<b>Unit height:</b>
600 x 1610 x 800	32 HE